

LookOurWay

50W GOBO LOGO PROJECTOR -USER'S MANUAL-

Please read the user manual before use



WHAT'S IN THE BOX

1. GOBO Logo Projector
2. Custom Printed Lens
3. Power Supply w/ Cable
4. Mounting Bracket
5. Remote Control



LENS ADJUSTMENT



Clarity Adjustment

After receiving the product, you must adjust the clarity of its projection.

Method for adjusting clarity: Rotate the lens at the front of the machine (there is a prompt label on the lens), turn the lens outward and adjust until the pattern is clear.

Note: The shorter the projection distance, the more the lens needs to be turned outward; the longer the projection distance, the more the lens needs to be turned inward.



Rotate or Static Adjustment Button

Remote Control Connection (Optional)


1. Adjusting pattern rotation and static state:

There is a built-in switch at the back of the machine; pressing the switch can toggle between rotation and static state of pattern.


2. Remote control function:

If you purchase the model with a remote control, the remote control can control the rotation and static state of the pattern as well as the main switch of the lamp.

Note: Remote control of rotation is only supported when the rotary switch is turned on.

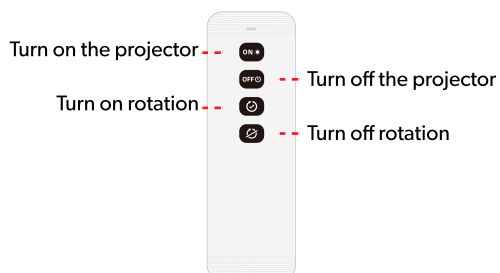

INSTALLATION METHOD

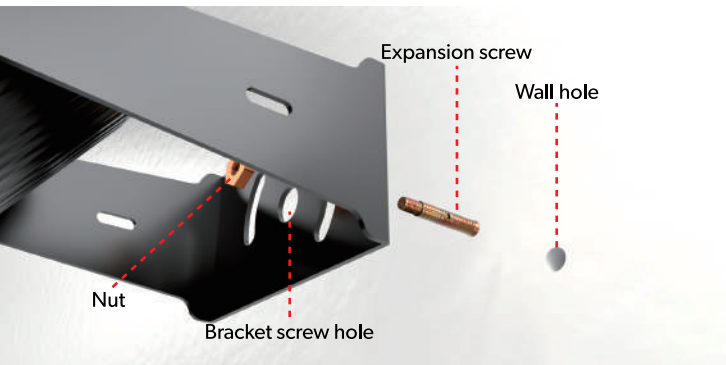

1. Drill screw holes at the location where the installation will take place.
2. First, place the expansion screws into the drilled holes.
3. Align the screw holes of the machine's base bracket with the threaded end of the expansion screws.

Note: The diameter of the wall hole is 10mm.




Screw the nut into the threaded end of the expansion screw until it is tight, and the installation is complete.

GOBO LENS REPLACEMENT METHOD



Step 1:

Use a screwdriver to unscrew the front of the lens and take out the original lens piece.

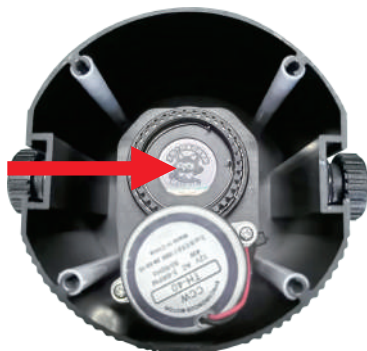

Step 2:

1. Take out the clamp ring to replace the lens piece (the original installation of the lens piece need to send a little glue, does not affect the removal of the lens piece).
2. Replace the new lens with the wrong side up and put in the clamping ring
3. Need to tighten the waterproof screws to avoid water.

TECHNICAL PARAMETER



Product Voltage : DC12-48V

Power : 50W

Heat Dissipation System : Natural heat dissipation of aluminum radiator

Weight : 4.8lbs

Shell Material : Aluminum alloy

Application : KTV, Bar, Internet Café, Restaurant, Coffee Shop, Exhibition Hall

Projection Distance : Up to 33ft

Light Resource : LED white light

NOTE :

1. Before installing this device, please read the contents of this manual carefully.
2. The contents of this manual are prohibited from the unauthorized use.
3. This manual is provided only for information, and all the contents of the manual will be changed without notice.
4. Please do not modify the equipment at will.

SAFETY TIPS :

1. Make sure the projector is disconnected before installation and maintenance.
2. Installation, operation and maintenance personnel must be familiar with the performance of the projector before the operation. Most of the damage is not familiar with the performance of the wrong operation caused.
3. Please do not face the luminous body for a long time to avoid the discomfort to the glasses.



BATTERY PARAMETER

No.	Parameters	Gross weight (kg)	Net weight (kg)	Standby time
1	Battery capacity: 6000 mAh (sufficient capacity) 18.5 V / 6A Input voltage: 16.8V Output voltage: 12.8 - 16.8V Operating temperature: -20° to 60° Lithium battery rechargeable battery With DC5521 charging and discharging head	1	0,88	15W : 6 hours 25W : 3.6 hours 35W : 2.6 hours 50W : 1.8 hours 60W : 1.5 hours
2	Battery capacity : 10000mAh(Sufficient capacity) 18.5 V/10A Input voltage : 16.8V Output voltage : 12.8-16.8V Operating temperature : -20°~60° Lithium battery rechargeable battery With DC5521 charging and discharging head	1,5	1,25	15W : 10 hours 25W : 6 hours 35W : 4.5 hours 50W : 3 hours 60W : 2.5 hours
3	Battery capacity : 15000mAh(Sufficient capacity) 18.5 V/10A Input voltage : 16.8V Output voltage : 12.8-16.8V Operating temperature : -20°~60° Lithium battery rechargeable battery With DC5521 charging and discharging head	1,65	1,55	15W : 15 hours 25W : 9 hours 35W : 6.5 hours 50W : 4.5 hours 60W : 3.8 hours
4	Battery capacity : 20000mAh(Sufficient capacity) 18.5 V/20A Input voltage : 16.8V Output voltage : 12.8-16.8V Operating temperature : -20°~60° Lithium battery rechargeable battery With DC5521 charging and discharging head	2,1	1,95	15W : 20 hours 25W : 12 hours 35W : 8.5 hours 50W : 6 hours 60W : 5 hours



WARRANTY DESCRIPTION

For products purchased by consumers through formal channels, the Company provides one-year warranty service from the date of purchase. The starting date of the warranty period shall be the date of the purchased products. In normal use, non-human caused failure or damage, purchasers can take the warranty card, purchase certificate and damaged products to the repair point for maintenance.

Under any of the following circumstances, it does not fall within the scope of free maintenance:

- Failure caused by failure to follow instructions.
- A fault caused by self-diassembly or repair.
- Failure caused by accident, misuse or deliberate damage.
- No warranty card or the warranty card is altered. For products beyond the warranty period or not under free maintenance, our customer service department will also serve you warmly.
- Lifetime maintenance after warranty.
- The manufacturer has the right to modify the product without prior notice.
- Services beyond the products promised by individual sales people and additional configurations and giveaways are not covered by the warranty.
- All contents in this manual have been carefully checked. In case of any typographical errors or misunderstandings, the company reserved the right of final interpretation.

CERTIFICATION

Job number : _____

Check out : _____

005

qualified

WARRANTY CARD

Thank you for your trust and support of this product, we will be dedicated to provide you with services. Please fill in the relevant entries and stamp the official seal of the sales unit to ensure your legitimate rights and interests.

Product model:	Serial number:	Date of purchase:
Customer name:		Phone:
Customer address:		Postcode:
Distributor name:	Phone:	Dealer stamp office
Address:		
Postcode:		
Servicing time	Handling method	Failure cause

**This warranty card is quality guarantee certificate of our company, and the contents shall not be altered without authorization. Please keep this card properly and keep it in the product packaging box to protect your legitimate rights and interests.*

For product support
Please give us a call at

866-586-3888

or email

support@lookourway.com