
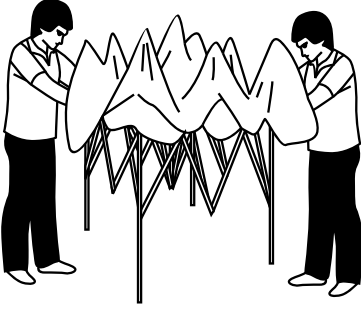
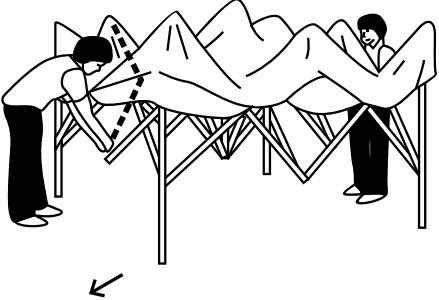
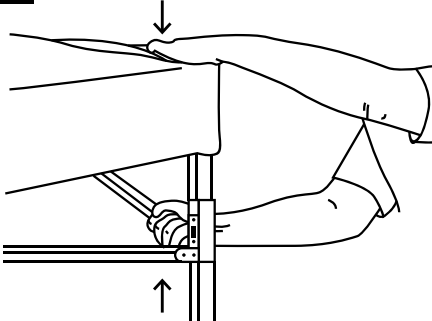
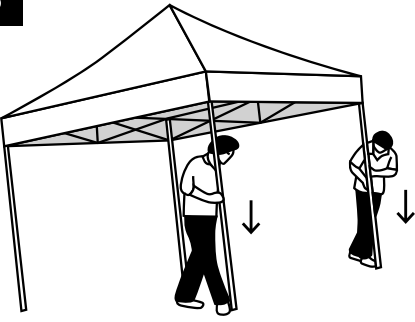
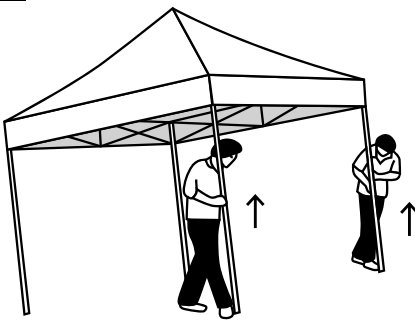

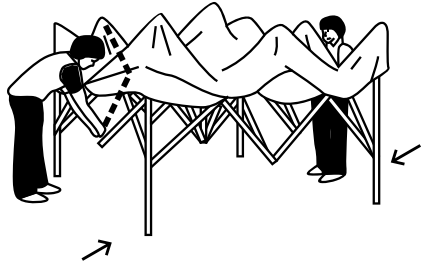


CANOPY TENT INSTALLATION INSTRUCTIONS

Please read each step before you attempt set-up!

<p>1</p>  <p>Place canopy tent frame in center of area to be tented. Remove cover.</p>	<p>2</p>  <p>Have 2 people stand on opposite sides, grasp two outer legs, lift off of ground and step backwards, stopping at arms length.</p>	<p>3</p>  <p>Grasp the bottom of the diamond (shown) on the opposite sides. Lift up and step backwards until tent is fully opened. Being careful not to pinch fingers</p>
<p>4</p>  <p>Engage the auto slider at each corner by pushing up with one hand while holding down top of leg with other hand. Snap button will engage when in groove. Repeat on all other legs.</p>	<p>5</p>  <p>Lift two adjacent outer legs up and pull out the inner legs until snap locks. Repeat on all legs. Raise or level the tent using adjustment holes found near bottom of each outer leg.</p>	<p>IMPORTANT</p> <ul style="list-style-type: none"> ● WINDY CONDITIONS: Use stake kit or weight bag set. ● HEAVY WIND: Take tent down. ● WET FABRIC: Let tent dry before closing. ● STORAGE: Use cover bag when not in use. ● CLEANING: Use mild detergent and water. ● RAIN: Do not leave tent unattended.


HOW TO TAKE DOWN YOUR SHELTER

<p>1</p>  <p>Lift two outer legs slightly, depress snap button, telescope inner legs up into outer legs. Repeat on opposite side.</p>	<p>2</p> <p>RELEASE SNAP-BUTTON</p>  <p>Release auto slider at each corner by pushing snap-button to release the slider. Repeat on all four corners.</p>	<p>3</p>  <p>Grasp top of diamond on opposite sides, lift up, shake tent a little while stepping towards partner until unit is 3/4 closed. Grasp two outer legs, push together to fully close (do not pinch fingers). Put on cover bag.</p>
---	---	---

HALF SIDE WALL INSTALLATION INSTRUCTIONS


1

Note the 2 different bracket shapes

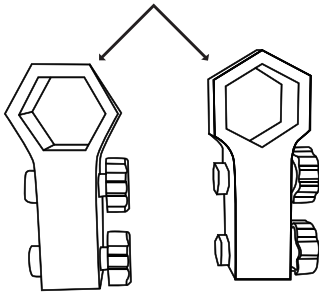


Identify canopy frame leg orientation and pair bracket accordingly
(Flat bracket w/ Flat side leg and Pointy bracket w/ pointy leg)

2

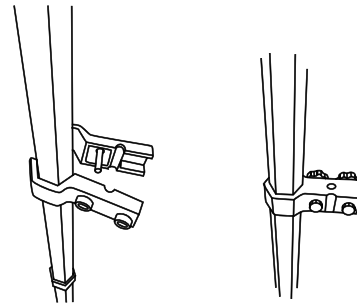


Split each clamp in half and align each bracket onto the correct legs (note: there are 2 different bracket shapes). Tighten only one of the bolts on each bracket until fully assembled

3

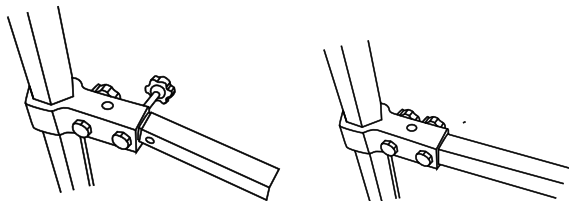


Insert the sidewall pole set in to the bracket and tighten the second bolt

4

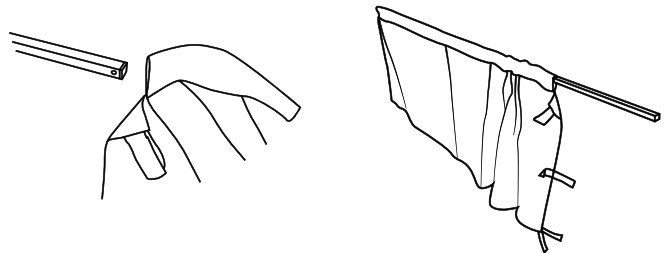


Identify the sidewall opening and feed it through the sidewall pole.

5

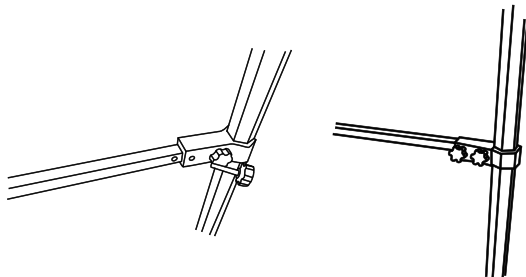

Insert the opposite side of the sidewall pole into the bracket and tighten the second bolt.


6

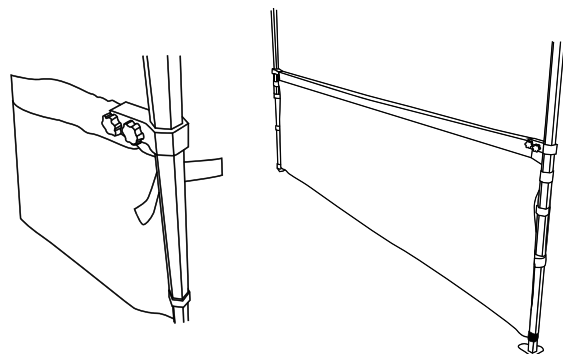

Adjust sidewall straps in place


BACK WALL INSTALLATION INSTRUCTIONS

1

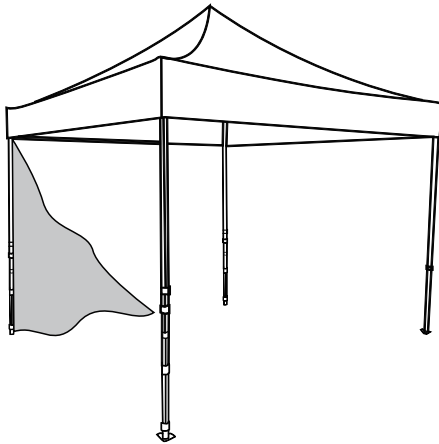


Identify the top corner of the back wall and pair it with the top corner of the canopy top.

2

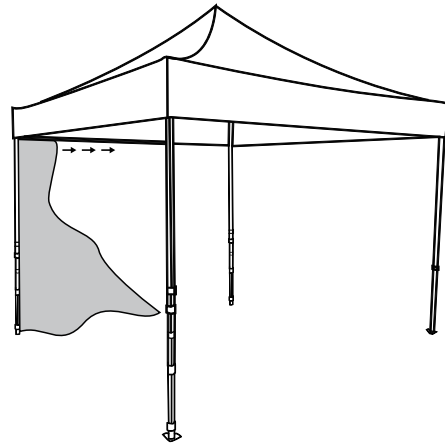

Begin strapping the back wall along the canopy top until you reach the end.

3

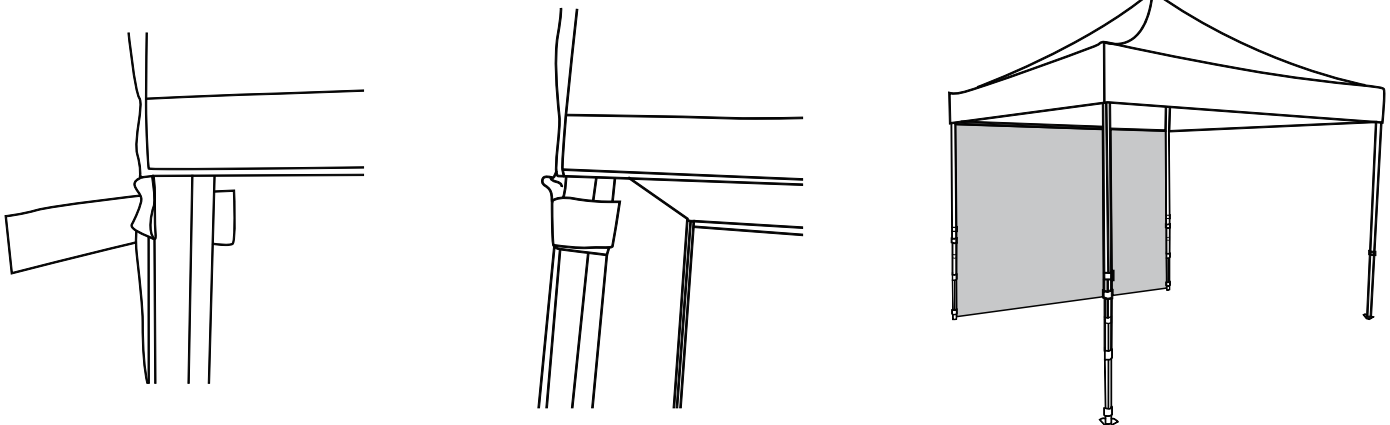

Secure and strap the back wall sides.